



Solutions for hazardous energy control

Lockout / Tagout



011 391 9080
deltahealth.co.za
sales@deltahealth.co.za
60A Director Road, Spartan, Kempton Park

Go for zero



"A co-worker dies, and 160 others have a work-related accident, every 15 seconds. (International Labour Organisation, 2015)

Workplaces claim more than 2.3 million deaths per year, including 350,000 fatal accidents and close to 2 million life ending work-related diseases.

In addition, 313 million accidents happen on the job every year, 268 million of those resulting in at least 3 days absence from work. ILO estimates the cost of work accidents & professional diseases indemnities and absences to 4% of the world GDP. Workplace accidents not only impact companies (Figure 1) but also people's lives and the overall health of the available workforce. (Figure 2)

Figure 1: Economic effects of safety and health at company level


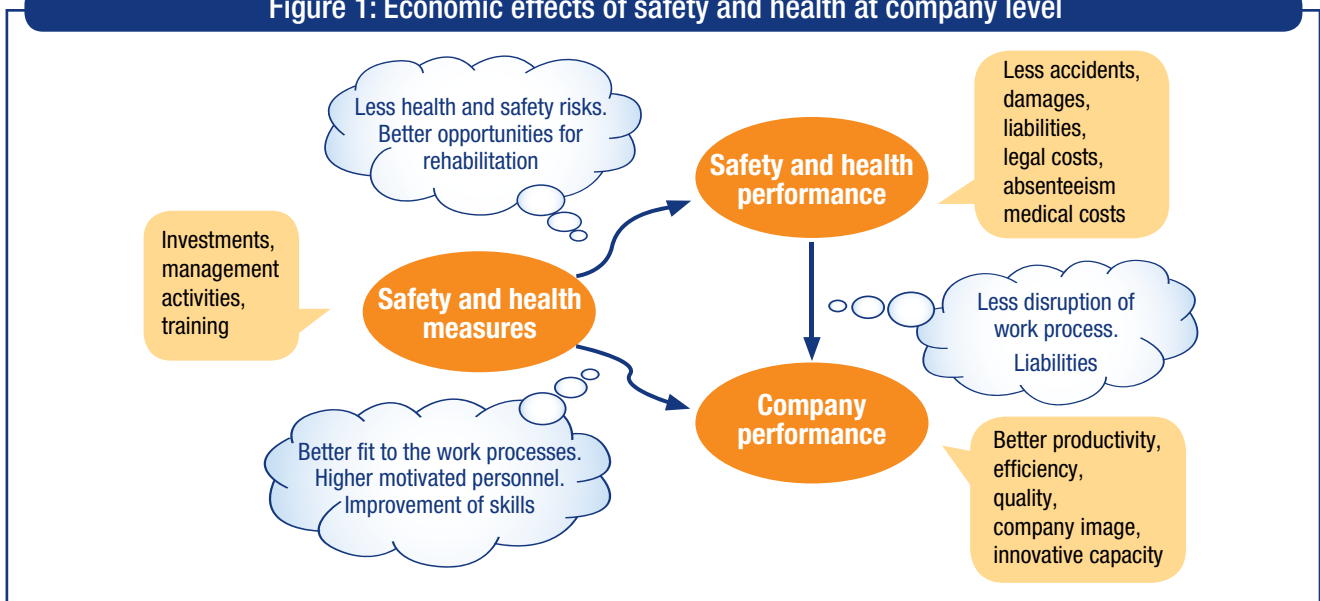


Figure 2: Work accidents inflict costs on many parties (adapted from Krüger, 1997)

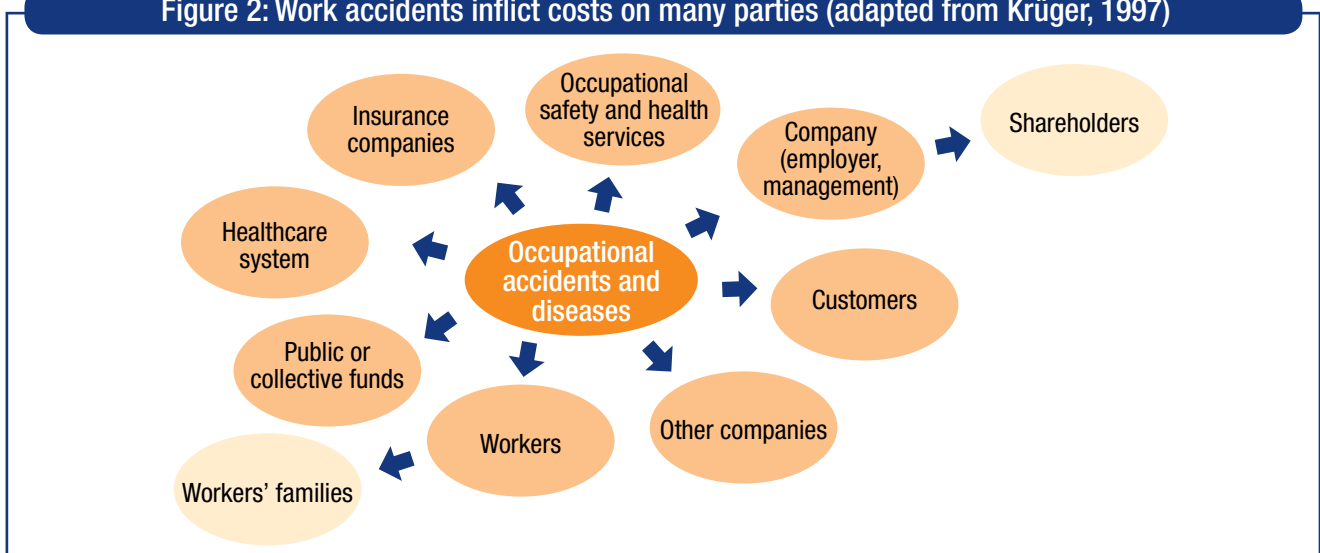

Source: Inventory of socioeconomic costs of work accidents, Joss Mossnik, Marc de Greef, 2002

Throughout the world, companies are starting to meet the workplace safety challenge with intensive 'Go for Zero'-strategies, expressing their unwavering ambition to reduce workplace accidents. Brady, a worldwide manufacturer and supplier of Safety Solutions, supports 'Go for Zero'-strategies with a broad range of quality products, including on-site printable safety signage, custom signs, pipe markers, spill control and Lockout/Tagout.

In this brochure, you can look through our solutions for maintenance related accident prevention. Solutions related to other activities can be found in our other safety solutions brochures.



Why and how to implement a lockout/tagout program

Use this reference guide to gain a better understanding of Lockout/Tagout procedures. More in-depth information regarding padlocks, lockout devices and tags can be found throughout the catalogue.

- 6 What is lockout/tagout & why work with Brady?
- 6 Lockout/tagout - global best practice training movie
- 7 Why implement a lockout/tagout program?
- 7 Brady's complete LO/TO solution
- 8 Efficient lockout program in 4 steps
- 10 Respecting legal requirements
- 12 ATEX certification
- 13 Safety software & services
- 16 Effective control of hazardous energy



Why and how to implement a lockout/tagout program

What is lockout/tagout?

Lockout / Tagout is a planned safety procedure which involves turning off the energy supply of industrial machinery and equipment whilst maintenance work or repairs are being carried out. This procedure protects workers from the risks posed by live machinery or electricity.

LO/TO SAVES LIVES!

Why work with Brady?

Brady is the global leader in Lockout/Tagout solutions.

Brady was the first to respond to the new OSHA legislation in the U.S. in 1990, and has maintained its position as a leading Lockout solutions provider ever since. Today, Brady offers a comprehensive package for Lockout/Tagout compliance.

Increasing demand for advanced safety solutions in Europe and MEA countries has driven our R&D as well as know-how to become the best-in-class LO/TO complete solution provider.



Lockout/tagout - global best practice training movie

This instructional program is designed to inform and train organisational safety leaders, as well as employees who may be exposed to hazardous equipment energies. It will help employers to develop and improve their company's Lockout / Tagout program. It is also extremely beneficial for all employees who shut down and service equipment, instructing them how to avoid accidents and remain safe on the job.

Highly comprehensive content

The product's composition is as follows:

- The Movie
- A Quick Start Guide
- An Instructor's Guide
- An Employee Quiz

The Employee quiz can be used at the end of the training program. It allows to test the employee's knowledge after the training session and facilitates a discussion. A padlock engraved "LOTO saves lives" is included in the product box.

All parts are available electronically on a USB key (Quick Start is also available in a hard copy format), and accessible in 10 different languages for EMEA: English, French, German, Dutch, Spanish, Italian, Portuguese, Turkish, Polish and Russian.



Order Reference	Description
833918	Lockout / Tagout – Global Best Practice Training Movie. Reduce work accidents!

Why and how to implement a **lockout/tagout program**

Why implement a lockout/tagout program?

Reduced accident rates and injury costs

EU Figures show that 10 to 15% of all fatal accidents at work and 15 to 20% of all accidents are connected with maintenance. Common injuries include fractures, lacerations, amputations, burns and shocks. Due to the serious nature of many maintenance accidents, injury-related costs can be exorbitant.



Less downtime, higher productivity

A well-organised LO/TO program that includes clearly labelled energy sources, easy-to-follow procedures, and readily accessible lockout tools can greatly speed up maintenance and servicing activities. Workers can avoid time-consuming tasks such as tracing pipelines and electrical circuits in order to verify the appropriate energy control points. As a result, maintenance work is completed more efficiently, downtime is reduced and machinery is kept running at peak performance levels.



Reduced indirect costs

Accidents can have a significant impact on work scheduling and productivity at the affected job site. The unexpected start up of equipment can also cause extensive damage to the machinery itself, adding the expense of equipment repairs and replacement to the total cost involved.



Best Safety Practice

Lockout/tagout has become globally recognised as best safety practice for many industries and is a legal requirement in the US.



Brady's complete LO/TO solution

Complete attitude to effective energy control via audit, identification of energy points, selection and purchasing of proper devices, elaboration of instructions, training and implementation.





Efficient lockout program in 4 Steps

Follow the BEST GLOBAL PRACTICE plan for creating an efficient lockout program:



1 Create energy control (LO/TO) policy & procedures

The first step is to develop and document a lockout policy that identifies in detail the purpose and scope of the lockout program. We can help you to create a roadmap for the successful LO/TO program implementation, where you need to execute an audit of all existing potential sources of hazardous energy, create a list, describe procedures and define responsibilities.

TIP: LO/TO policy should include:

- ✓ Purpose and scope
- ✓ Authorised personnel
- ✓ Enforcement policy
- ✓ Training methods
- ✓ Address special circumstances such as group lockout, shift transfer etc.



Why do you need lockout procedures

- Procedures serve as a check sheet to help employees avoid mistakes and reduce the risk of accidents and injuries.
- Procedures speed lockout activity, which in turn reduces downtime and improves operational productivity.
- Documented machine-specific energy control procedures are required by OSHA.

2 Identify all energy control points

In this step you need to localise and clearly mark all energy control points, including valves, switches, breakers and plugs, with permanently placed labels or tags. Our label makers and Do-It-Yourself Signmarking printing systems together with durable label materials are designed to provide you with reliable and long-lasting identification.



BradyPrinter S3100
SIGN & LABEL PRINTER



BBP 35
MULTICOLOUR LABEL PRINTER
BBP 37
MULTICOLOUR & CUT LABEL PRINTER



BBP 85
LABEL PRINTER



BradyJet J4000
COLOUR LABEL PRINTER



Efficient lockout program in 4 Steps

Follow the BEST GLOBAL PRACTICE plan for creating an efficient lockout program:

3 Equip authorised employees with the proper lockout tools and warning devices

Brady offers a comprehensive line of LO/TO devices and tools - Padlocks include safety, non-conductive, brass, Lockouts include Valve, Universal and Circuit breakers, Tags, Labels, Lockout Boxes, Padlock Stations and much more!



4 Train employees and promote awareness of safe work practices

Brady offers its expertise in training employees and supervisors. We can prepare a fair plan for training sessions, define the required content for a particular audience and train your supervisory staff to be able to perform internal training.



Keep in mind all the people in your facility, recognise 3 groups with different needs of awareness degree:

Authorised employee	→	A person who locks out or tags out machines or equipment in order to perform servicing or maintenance and identifies that equipment have a source(s) of energy that can cause injury to the employee.	→	Requires the most in-depth training about LO/TO.
Affected employee	→	An employee whose job requires him/her to operate or use a machine or equipment on which servicing or maintenance is being performed under LO/TO, or whose job requires him/her to work in the area.	→	Needs to be informed about LO/TO and does not attempt to remove lockout devices.
Other employees	→	Who may encounter lockout being implemented.	→	Need to know the significance of lockout, and to keep away.

- ▶ **Do not forget about different circumstances:**
- Shift changes
 - Outside contractors & outsourced maintenance

Respecting legal requirements and technical standards



EUROPE

Directive 2009/104/EC (formerly directive 89/655/EEC of the Council from 30 November 1989) specify the minimum requirements for safety and health protection for workers using work equipment at work. Paragraph 2.14 lays down that “every piece of equipment must be fitted with clearly visible devices with which it can be separated from every energy source”. Paragraph 2.15. lays down that “Work equipment must bear the warnings and markings essential to ensure the safety of workers”.

EN ISO 14118 (2018-07) norm of Safety of machinery (is the successor to DIN EN 1037 2008-11) related to the equipment’s safety defines the measures regarding the energy isolation of machinery and the power dissipation to prevent hazardous equipment re-energising. It assures a safe and secure intervention within a risk-prone area.



AUSTRIA

AschG – ArbeitnehmerInnenschutzgesetz – Federal Act on Occupational Health and Safety
AM-VO – Arbeitsmittelverordnung (Ordinance on Work Equipment and Tools) – Regulation of the Federal Ministry of Commerce and Labour on protection of employees while using work equipment paragraph 1, §17 (1).




FRANCE

UTE C18-510 (electrical applications): Lockout of apparatus for service and maintenance to lockout equipment is to carry out the necessary procedures to ensure that the equipment is placed and maintained in a safe position; to prevent its activation and label that the isolated equipment must not be operated. The employer must ensure that all safety procedures are strictly implemented and regularly reviewed by appropriate means. Employees must use all necessary tools to carry out maintenance.

Best practice document developed by INRS (Institut National de Recherche et de Sécurité) in November 2011: ED 6109

- Décret 2010-1016 refers to the obligations of the employers for temporary or permanent electrical installations usage
- Labour code (article R4215-10) refers to the identification of the conductors
- Décret 2010-1018 refers to the prevention of electrical risks in work environment, décret 2010-2118 refers to the operations done on electrical installations.
- Labour code (article R 4544-5): the part of the installation on which work (de-energised) is done must be identified and locked.
- Arrêté of April 26, 2012: Every operation on electrical equipment must follow the new norm NFC18-510. Article 1 says that this norm is now included into the French Code of Labour.

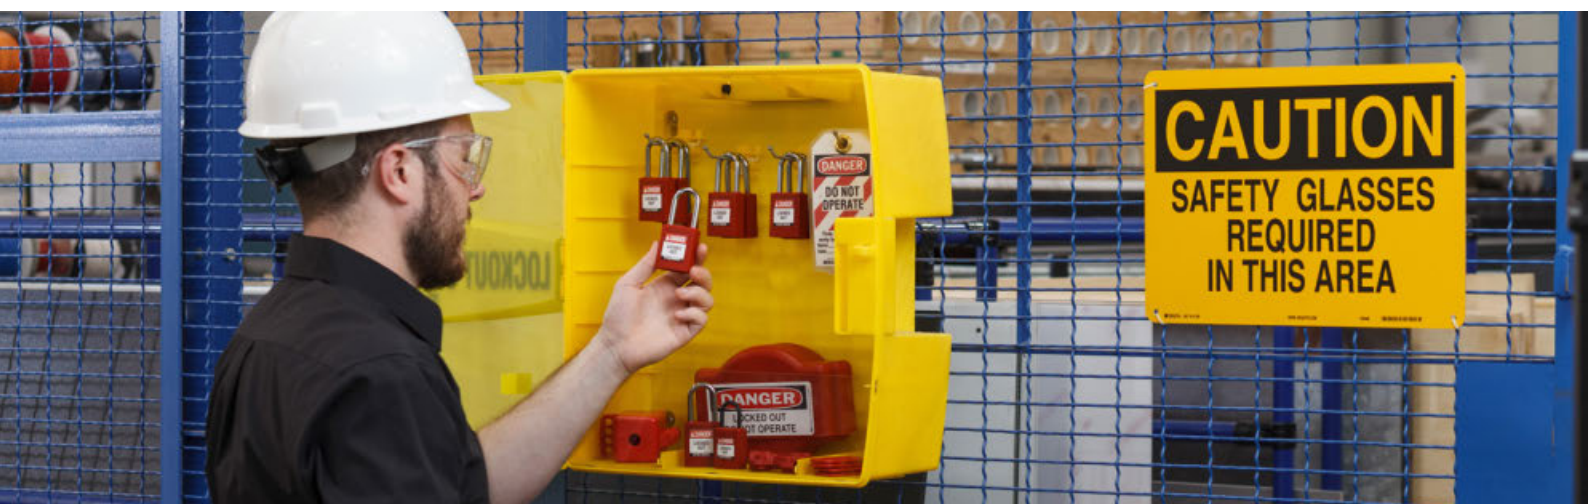

Respecting legal requirements and technical standards



GERMANY

BetrSichV 2015 (Ordinance on Industrial Safety and Health)

Ordinance concerning the protection of safety and health in the provision of work equipment and its use at work and maintenance processes.

Extract from BetrSichV 2015

§ 8 Protective measures in case of hazards caused by energies, start-up and stoppage

Paragraph 3: "Command devices which have an influence on the safe use of the means of work shall in particular be secured against unintended or unauthorised operation.

Paragraph 4: "Work equipment may only be intentionally put into operation. If necessary, the start-up process must be safely prevented.

§ 10 Maintenance and modification of work equipment

Paragraph 3: The employer must take all necessary measures to ensure that maintenance work can be carried out safely.

(3) to secure the working area during the maintenance work

(6) to avoid hazards caused by moving raised work equipment or parts thereof, as well as by hazardous energies or substances.

(9) Provide necessary warnings and dangers messages referring to maintenance work on the work equipment

Paragraph 4: Where, in the case of maintenance activities ... are carried out under the threat of energy, the safety of workers shall be ensured during the duration of this work by means of other appropriate measures.



ITALY

The Italian legislation (Direttiva 2001/45/CE del Parlamento europeo e del Consiglio del 27 giugno 2001 che modifica la direttiva 2009/104/EC) concerns the minimum safety and health requirements for the use of work equipment by workers at work.



SWITZERLAND

- UVG – Federal Law on Accident Insurance VUV – Regulation on the Prevention of Accidents and Occupational Diseases title 1, chapter 2, paragraph 1, art. 3; title 1, chapter 3, paragraph 2, art. 30, 31 paragraph 3, art. 37; paragraph 4, art. 43
- EKAS Guideline no. 6512 – Work Equipment

These regulations clearly stipulate that during maintenance, adjusting or cleaning of the equipment, it has to be in non-operative state and appropriate devices have to be used to ensure that, for example, a machine is not accidentally switched on.



SPAIN

The Spanish directive (REAL DECRETO 1215/1997, de 18 de julio por el que se establecen las disposiciones mínimas de seguridad y salud para la utilización por los trabajadores de los equipos de trabajo. BOE nº 188 07-08-1997) states the minimum safety and health for workers' use of work equipment.

Respecting legal requirements and technical standards



UK ONLY: BS7671:2008

In the UK the Provision of Work Equipment Regulations – Regulation 19 – Isolation from Sources of Energy states: “Every employer shall ensure, that where appropriate, work equipment is provided with suitable means to isolate it from all its sources of energy. Every employer shall take appropriate measures to ensure that reconnection of any energy source to work equipment does not expose any person using the equipment to any risk to his health or safety.



USA (OSHA - OCCUPATIONAL SAFETY & HEALTH ADMINISTRATION)

OSHA regulation The Control of Hazardous Energy (Lockout / Tagout) 1910.147 states that it “requires employers to establish a program and utilise procedures for affixing appropriate lockout devices or tagout devices to energy isolating devices and to otherwise disable machines or equipment to prevent unexpected energisation, start up or release of stored energy in order to prevent injury to employees.



Implemented LOCKOUT/TAGOUT is the law in some EU countries and considered to be best practice in all European countries!

ATEX STANDPOINT

The ATEX directive consists of two EU directives describing what equipment and work environment is necessary to maintain safety in spaces with a potentially explosive atmosphere.

This ATEX directive was published on Saturday 29 March 2014, under the reference : Directive 2014/34/EU of the European Parliament and of the Council of 26 February 2014 on the harmonisation of the laws of the Member States relating to equipment and protective systems intended for use in potentially explosive atmospheres (recast) (Text with EEA relevance) - Official Journal of the European Union L 96 from 29/03/2014.

Areas classified into zones (0, 1, 2 for gas-vapor-mist and 20, 21, 22 for dust) must be protected from effective sources of ignition.[1] Equipment and protective systems intended to be used in zoned areas must meet the requirements of the directive. Zone 0 and 20 require Category 1 marked equipment, zone 1 and 21 require Category 2 marked equipment and zone 2 and 22 require Category 3 marked equipment. Zone 0 and 20 are the zones with the highest risk of an explosive atmosphere being present.

Equipment in use before July 2003 is allowed to be used indefinitely provided a risk assessment shows it is safe to do so.

The aim of Directive 1999/92/EU - on minimum requirements for improving the safety and health protection of workers potentially at risk from explosive atmospheres.

This Directive requires employers to introduce technical and/or organisational measures which (a) prevent the formation of explosive atmospheres and/or (b) prevent the ignition of explosive atmospheres and/or (c) reduce the effects of an explosion so that there is no longer a risk to workers.

Several of Brady's lockout devices and padlocks meet the ATEX standpoint. These are highlighted in the brochure.

Safety software & services

Custom lockout procedures implemented at your sites

Brady engineers have created thousands of lockout procedures for hundreds of companies in various industries. Get them to write and implement your best-in-class, company-approved, custom Lockout/Tagout safety procedures as well.

Best practice procedure writing

STEP 1: on-site audit

A credentialed Brady Field Engineer organises a scoping meeting, and will then start collecting data at your premises for each piece of equipment.



STEP 2: procedure writing

Using the collected information, the Field Engineer creates custom, machine-specific illustrated lockout procedures for each piece of equipment. The procedures outline the steps to isolate machines from their energy supply, to release any residual energy, and to check their energy-neutral state.




STEP 3: procedure approval

All lockout procedures are presented via the LINK360 software to facilitate company-approvals, edits and digital or printed communication.




STEP 4: energy source labelling

The Field Engineer labels all energy control points using standard colour-coded energy source ID tags. The tagged energy control points will be referred to in your custom lockout procedures using pictures.

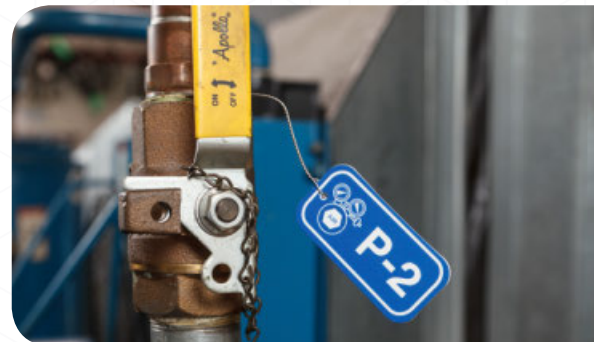

Safety software & services

Discover the LINK360™ software solution advantage

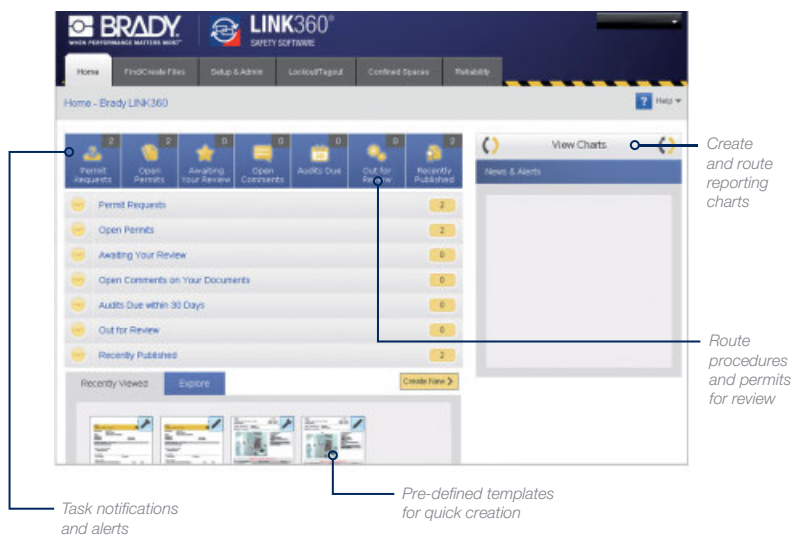

Link360™ Software is the first software to give you a complete view of the activities associated with creating, reviewing and updating visual information. This software provides an easy way to keep your safety procedures accurate, compliant and sustainable – both in your facility and across multiple locations.

Download now!
Download the iOS app or Android app.

iOS app Android app.

The image shows a smartphone and a tablet displaying the LINK360 app interface. The smartphone screen shows a 'Lockout/Tagout' screen with a list of items. The tablet screen shows a 'Permit Request' screen with a form for creating a permit.



Safety software & services

Discover the LINK360™ software modules

Pre-defined templates and the ability to easily add users from any site in your company, create a comprehensive yet easy to use solution to manage your Lockout/Tagout, Reliability and Confined Space activities.



The **lockout/tagout Module** focuses on creating and maintaining a safe working environment with tools to help lock out hazardous energy sources. By accessing this module users can:

- Manage lockout/tagout programmes to perform maintenance on machinery.
- Create visually instructive safety procedures, tags, and energy source labels for printing.
- Meet regulatory requirements and industry standards on lockout of hazardous energy sources.
- Free mobile app for iOS or Android, mobile phones and tablets.



The **Reliability Module** provides tools to streamline regular equipment checks. By accessing this module users can:


- Manage the creation of visually instructive maintenance procedures that assist operators, engineers, and technicians in maintaining machine equipment performance levels.
- Control access to who may view, edit, and create templates and procedures.
- Free mobile app for iOS or Android, mobile phones and tablets.



The **Confined Spaces Module** allows users to compile assessments, create permits, and track history for confined space permitting.

- Identify confined space hazards and classify a space as a 'permit required' confined space.
- Entrants are able to fill out permission requests online for approval.
- Meet regulatory requirements and industry standards on lockout of hazardous energy sources.
- Permission history is logged for future audits and reporting.

LINK360 cloud-based answers the most pressing visual information needs. Faced with the task of handling visual information across multiple locations, companies need a way to take the management of equipment visuals to the next level by closing the loop on scalability and sustainability.

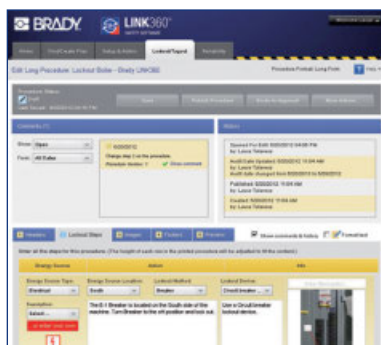

1. Design



2. Post



3. Monitor

Effective control of hazardous energy




Effective control of hazardous energy

To ensure de-energisation and isolation of all potentially hazardous energies that supply production or facility operating equipment, so that the equipment can be safely serviced or maintained.

Energy isolating device – a mechanical device that, when utilised or activated, physically prevents the transmission or release of energy, including

- a manually operated electrical circuit breaker
- a disconnect switch
- a gate / ball / plug / butterfly shut-off valve

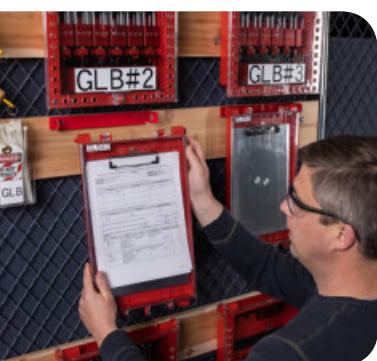

Hazardous energies where LO/TO is the ideal means of control:

- Electrical
- Mechanical
- Pneumatic
- Hydraulic
- Liquid & gaseous chemicals
- Thermal
- Hot surfaces & substances
- Gravitational
- Overhead objects or equipment that may fall & crush
- Other stored energy
- Flywheel stopped mid-motion, residual electrical that needs to be bled

Remember that production, plant or facility equipment commonly have **more than 2 types of energy present.**



Padlocks

Brady's high quality padlocks are ideally suited for lockout tagout applications.

- 18 Find the best padlock for your needs
- 20 Padlock comparison
- 23 Brady SafeKey Lockout Padlocks
- 25 SafeKey nylon padlocks
- 27 Traditional Nylon Padlocks
- 28 SafeKey Nylon Compact Padlocks
- 30 Traditional Nylon Compact Padlocks
- 31 Traditional Nylon Compact Cable Padlocks
- 32 Safety Security Padlocks
- 32 Brass Padlocks
- 33 SafeKey aluminium padlocks
- 34 Traditional Full Aluminium Padlocks
- 35 Traditional Aluminium Compact Padlocks
- 36 Laminated steel padlocks
- 36 Ultimate Security Padlocks
- 37 Fully insulated padlocks
- 37 Brass Padlocks with stainless steel shackle
- 37 Brass Padlocks with hardened steel shackle
- 37 Combination padlock
- 38 Safety lock & tag carrier
- 38 Labels and tags for padlocks
- 39 Padlock lubricant
- 39 Cable & chain



Find the best padlock for your needs

With so many options available, choosing the right padlock for your job can be confusing. Let us help you get the padlock that fits your needs.

Body material options



Nylon

Non-conductive

Ideal for electrical applications and enclosures

Easy to carry

Lightweight with ribbed design for easy gripping

Key retaining security*

Key releases only on lock closure

Most common

Preferred for most indoor lockout applications



Aluminium

Long-lasting

Anodised, corrosion-resistant finish provides extended life

Increased security

Durable construction for better tamper resistance

Corrosion resistant

Resilient against harsh environments, such as food, oil and chemical

Versatile usage

Great for indoor and outdoor use



Steel

Heavy-duty

Laminated steel body withstands severe physical abuse

Maximum corrosion protection

Individual coated steel plates protects against extreme corrosion

Key retaining security


Key releases only on lock closure

Highest durability

High performance in extreme outdoor and harsh environments

*Not all nylon padlocks have a key retaining feature

Body size options



Compact

Material availability

Nylon, aluminium

Ideal usage

Everyday applications, small spaces and circuit breakers



Standard

Material availability

Nylon, aluminium, steel

Ideal usage

Fits wide variety of devices - electrical, valve and cable



Long body

Material availability

Nylon only

Ideal usage

Displaying additional information and languages on body label

Shackle material options



Steel shackle

Vertical Clearance Options

20, 38, 50, 76 mm

Body Material Availability

Nylon, aluminium, steel

Ideal Usage

Most common with extra durability for tough environments



Plastic shackle

Vertical Clearance Options

25, 38 mm

Body Material Availability

Nylon only

Ideal Usage

Non-conductive for working on electrical circuits/panels



Aluminium shackle

Vertical Clearance Options

25, 38, 40, 50, 75 mm

Body Material Availability

Nylon only

Ideal Usage

Ideal for electrical applications and small spaces



Cable shackle

Vertical Clearance Options

106.68 & 203.20 mm

Body Material Availability

Nylon only

Ideal Usage

Versatile, multi-purpose solution, angle and twist to fit tight spaces

Body colour options

Body material

Nylon

Aluminium

Steel

Available colours



Shackle size options

								
Shackle size	20 mm	25 mm	38 mm	40 mm	50 mm	75 mm	106.68 mm	203.20 mm
Shackle material	Steel only	Nylon, aluminium, steel	Nylon, aluminium, steel	Aluminium	Aluminium, steel	Steel only	Cable only	Cable only
Body size	Standard only	Compact only	Standard, Compact, Long	Standard, Compact	Standard, Compact	Standard, Compact	Compact only	Compact only
Body material	Steel only	Nylon, aluminium	Nylon, aluminium	Aluminium only	Steel only	Nylon, aluminium, steel	Nylon only	Nylon only

Padlock types



SafeKey Lockout Padlocks

Advanced Key Security

Patent-pending locking mechanism includes six precision steel tumbler blades

More Unique Key Possibilities

Ideal for large organisations using hundreds to thousands of locks

Easy Operation

Extra smooth key insertion and removal – even when wearing gloves!

Long-lasting

Linear, low-friction lock mechanism helps maintain key integrity



Traditional Padlocks

Classic Padlock Design

Traditional jagged key design and pin tumbler lock mechanism

Fewer Key Combinations

Ideal for small work groups and facilities with fewer energy isolation points

Multi-purpose Solution

Flexible cable locks available for tight spaces and simultaneous lockout points

More Material Options

Available in non-conductive nylon, aluminum and laminated steel lock bodies

Keying options

Standard options



Keyed Different (KD) – Each lock is opened by its own unique key. Perfect for simple lockout applications and a manageable number of energy isolation points.




Keyed Alike (KA) – Each lock in the group can be opened with the same key. Easy to find the right key, reduces number of keys needed to carry. Ideal for individuals or trades responsible for multiple machines or isolation points.

Custom options



Master Keyed (MK) – Each grouping of locks (whether keyed alike or different) can be opened with a master key. Useful for larger, complex systems when supervisory access may be required



Grand Master Keyed (GMK) – The grand master key can open all locks grouped into two or more master keyed systems. Useful for larger, complex systems where supervisory or managerial access to all locks in the facility is needed.

Padlock comparison



	Traditional Nylon Compact aluminium shackle	SafeKey Nylon Compact plastic shackle	SafeKey Nylon Compact aluminium shackle	Traditional Nylon Compact Cable	Traditional Nylon steel shackle	SafeKey Nylon steel shackle	Traditional Full Nylon	SafeKey Nylon plastic shackle
Key mechanism	Pin Tumbler	Linear Blade	Linear Blade	Pin Tumbler	Pin Tumbler	Linear Blade	Pin Tumbler	Linear Blade
Shackle								
Stainless steel						38/76		
Hardened steel					38 (75*)			
Nylon (polymer plastic)		25					38	38
Aluminium	25/38/50/75		25/38		38 (75*)			
Brass								
Nylon encased steel								
PVC encased steel cable				200/400				
Diameter	4.72	4.72	4.70	4.72	6.35	6.35	6.35	6.35
Colours								
Red	•	•	•	•	•	•	•	•
Yellow	•	•	•	•	•	•	•	•
Black	•	•	•	•	•	•	•	•
Blue	•	•	•	•	•	•	•	•
Green	•	•	•	•	•	•	•	•
Orange	•	•	•	•	•	•	•	•
Grey (silver)	•			•	•		•	
White	•	•	•	•	•	•	•	•
Brown	•	•	•	•	•	•	•	•
Purple	•	•	•	•	•	•	•	•
Key possibilities								
KD	•	•	•	•	•	•	•	•
KA	•	•	•	•	•	•	•	•
MK	•	•	•	•	•	•	•	•
GMK	•	•	•	•	•	•	•	•
Key chart	•	•	•	•	•	•	•	•
# keys for KD	1	1	1	1	1	1	1	1
# keys for KA/MK/GMK	2	1	1	2	2	1	2	1
Key-retaining	•		•	•	•	•	•	
# of pins/blades	5	6	6	5	6	6	6	6
Engraving/Printing								
Front	•	•	•	•	•	•	•	•
Back	•	•	•	•	•	•	•	•
Side	•	•	•	•		•		•
Bottom								
Key	•	•		•	•	•	•	•
PrintFace		•	•			•		•
Labels supplied	EN/FR	EN/FR/ES	EN/FR/ES	EN/FR	EN/FR	EN/FR/ES	EN/FR	EN/FR/ES
Can be combined with								
Traditional Nylon Compact	•			•	•		•	
SafeKey Nylon Compact		•	•			•		•
Traditional Nylon Compact - Cable	•			•	•		•	
Traditional Nylon	•			•			•	
SafeKey Nylon		•	•			•		•
Traditional Full Nylon	•			•	•			
SafeKey Nylon		•	•			•		•
Traditional Nylon - Long Body	•			•	•		•	
Traditional Aluminium Compact	•			•	•		•	
Traditional Full Aluminium	•			•	•		•	
SafeKey Aluminium		•	•			•		•

*Only on request **Non key retaining on request



Traditional Long Body	Traditional Aluminium Compact aluminium shackle	Traditional Full Aluminium	SafeKey Aluminium steel shackle	Safety Security	Steel	Brass
Pin Tumbler	Pin Tumbler	Pin Tumbler	Linear Blade	Pin Tumbler	Pin Tumbler	Pin Tumbler
20/38/51 (75*)						
38*						
38*	25/40/50/75	25/40/75	38/76			21
				38/75		
6.35	4.75	6.35	6.35	6.50	6.35	6.35
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•	•	•	•	•	•	•
•*	•*	•	•	•*		•
•*				•	•	
•*	•*	•	•	•*	•	
•*	•*	•	•	•*	•	
•	•	•	•	•	•	(on request)
•	•	•	•	•	•	•
•	•	•	•	•	•	
•	•	•	•	•	•	
•	•	•	•	•	•	
1	1	2	2	1	1	2
2	2	2	1	1	2	2
•	•	•*		•**	•	•*
6	5	6	6	6	5	4
•	•	•	•	•		
•	•	•	•	•		
•	•	•	•	•		
•	•	•	•	•	•	•
•	•	•	•	•	•	•
EN/FR, EN/ES				EN/FR, EN/ES		
•	•	•				
•	•	•	•			
•	•	•				
•	•	•	•			
•	•	•	•			
•	•	•				
•	•	•	•			
•	•	•				

ULTIMATE



By printing (PrintFace)*

Print a face or any other personalisation in high resolution directly on the padlock, because safety is personal.

The print resists abrasion, chemicals and UV-radiation and can be applied both to the front and back of the padlock.



*PrintFace is exclusively available on SafeKey padlocks with custom keying or standard keying option.

ADVANCED



By engraving

Brady offers reliable laser engraving for all our Lockout/Tagout padlocks. Ideal in abrasive or heavy industrial contexts.

STANDARD



By labelling

Use the labels included with your Lockout/Tagout padlocks. It can include the name of its owner and a phone number or any other information.

Find out everything you need to know about personalising your padlocks on www.bradyeurope.com/padlockpersonalisation

Made like no other

In the last 50 years we've seen a manufacturing technology boom matched only by the industrial revolution. In fact, industrial maintenance employment has grown by more than 20% in the last decade.* With these advances, lockout needs have grown. Choose SafeKey Lockout Padlocks, exclusively from Brady, to lock in to ultimate key precision and advanced key security for years to come.

With this innovatively designed padlock you get up to **700% more unique key possibilities than a standard safety padlock**, without sacrificing a secure lockout. It's all in the forward-thinking design of the locking mechanism and unique key blade that gives you more precision and control in your lockout program. With that level of precision, you're covered from your simple to highly complex lockout needs. You also get:

- easy operation with extra smooth key insertion and removal – even when wearing gloves!
- fast identification with the colour-matched key and lock body
- years of use with the low-friction locking mechanism that helps maintain key integrity
- excellent durability in every industrial environment




9 different colour options available

*U.S. Bureau of Labor Statistics.
(2019, January 22). Occupational Employment Statistics. <https://www.bls.gov/oes/tables.htm>

See the difference in the details

Product innovations are only as good as the benefits they provide. See the difference you get with the patent-pending SafeKey Lockout Padlocks:

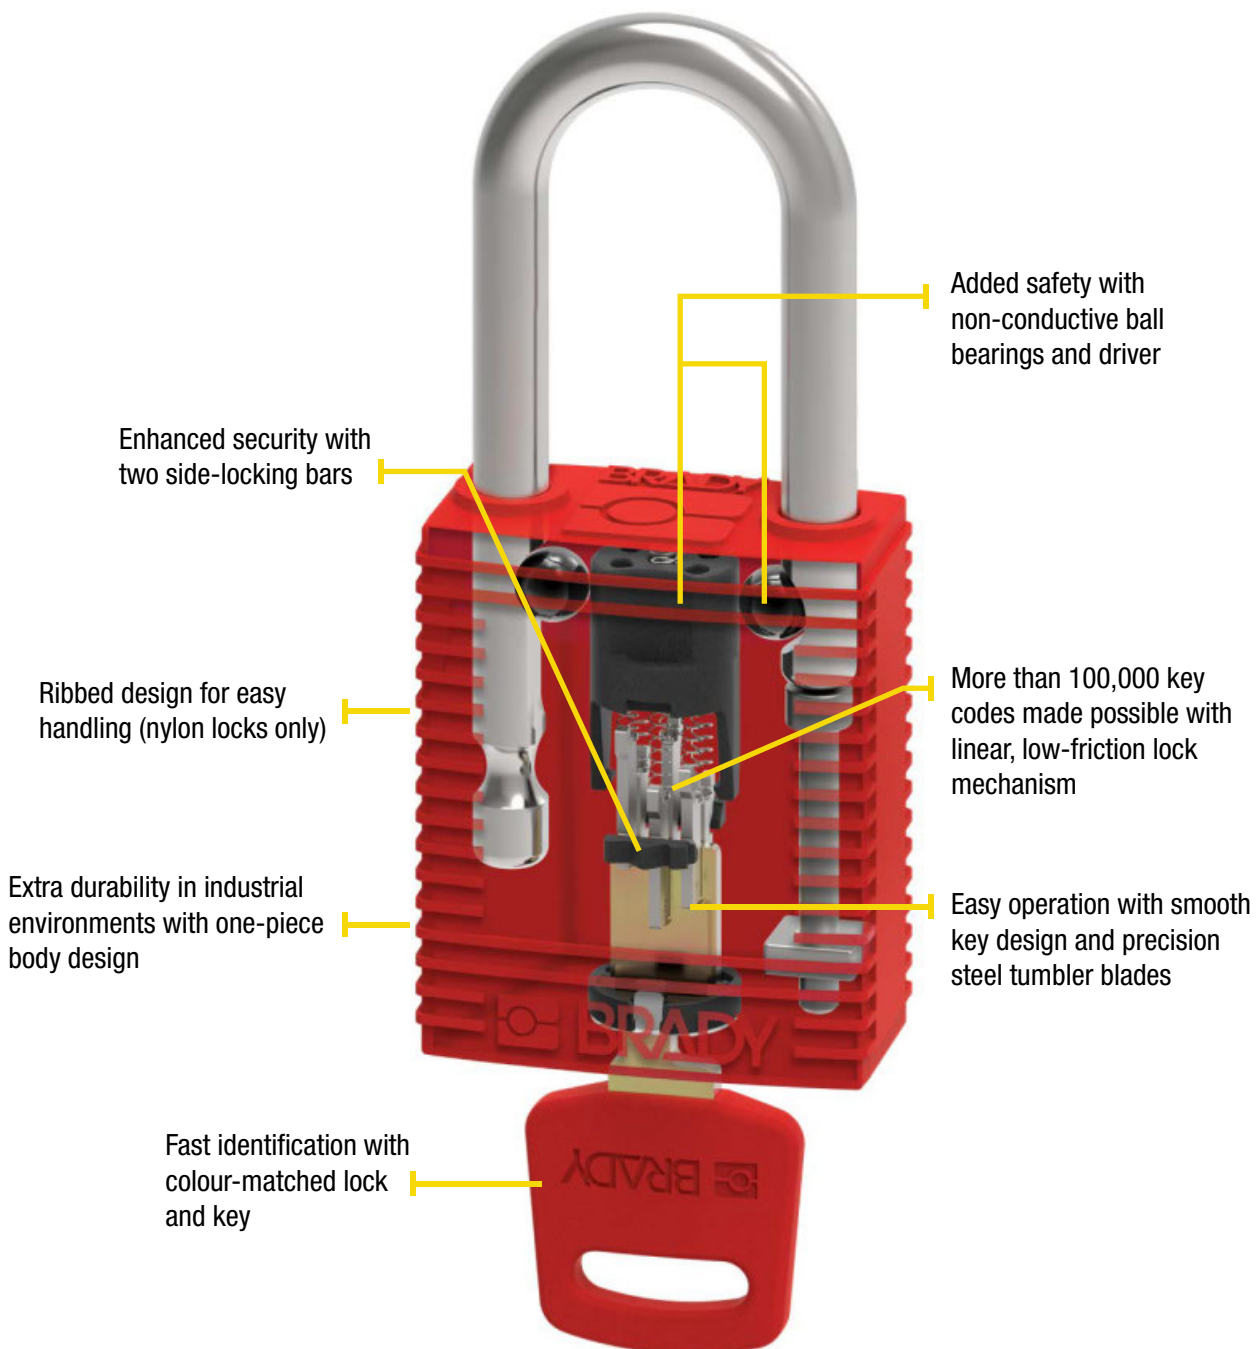

Traditional safety padlocks

- Pin tumbler lock mechanism
- Jagged key design
- Up to 15,000 key codes



See the new SafeKey Lockout Padlocks in action

Watch the video on:

www.bradyeurope.com/SafeKey



SafeKey nylon padlocks with steel shackle

- Lightweight non-sparking nylon body with a durable steel shackle
- Non-conductive locking mechanism
- Ribbed design for safe handling
- Ideal for general lockout applications
- Key-retaining lock feature

1 key supplied for each padlock. Custom keying options available.
Supplied with padlock labels in English, French and Spanish.
Engraving on front, back, sides & key.



Consult the technical
datasheet LOTO-101 on
bradyeurope.com/tds



Order Reference	Colour	Shackle Clearance (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Quantity
Shackle Clearance 38.10 mm / KA - Keyed Alike / pack of 3									
150294	● Black	38.10	6.35	20.32	33.02	19.05	45.72	38.10	3
150317	● Blue	38.10	6.35	20.32	33.02	19.05	45.72	38.10	3
150228	● Brown	38.10	6.35	20.32	33.02	19.05	45.72	38.10	3
150341	● Green	38.10	6.35	20.32	33.02	19.05	45.72	38.10	3
150364	● Orange	38.10	6.35	20.32	33.02	19.05	45.72	38.10	3
150229	● Purple	38.10	6.35	20.32	33.02	19.05	45.72	38.10	3
150271	● Red	38.10	6.35	20.32	33.02	19.05	45.72	38.10	3
150340	○ White	38.10	6.35	20.32	33.02	19.05	45.72	38.10	3
150246	● Yellow	38.10	6.35	20.32	33.02	19.05	45.72	38.10	3
Shackle Clearance 38.10 mm / KD - Keyed Differently / pack of 1									
150234	● Black	38.10	6.35	20.32	33.02	19.05	45.72	38.10	1
150251	● Blue	38.10	6.35	20.32	33.02	19.05	45.72	38.10	1
150275	● Brown	38.10	6.35	20.32	33.02	19.05	45.72	38.10	1
150368	● Green	38.10	6.35	20.32	33.02	19.05	45.72	38.10	1
150320	● Orange	38.10	6.35	20.32	33.02	19.05	45.72	38.10	1
150250	● Purple	38.10	6.35	20.32	33.02	19.05	45.72	38.10	1
150321	● Red	38.10	6.35	20.32	33.02	19.05	45.72	38.10	1
150367	○ White	38.10	6.35	20.32	33.02	19.05	45.72	38.10	1
150343	● Yellow	38.10	6.35	20.32	33.02	19.05	45.72	38.00	1
Shackle Clearance 38.10 mm / KD - Keyed Differently / pack of 6									
150224	● Black	38.10	6.35	20.32	33.02	19.05	45.72	38.10	6
150316	● Blue	38.10	6.35	20.32	33.02	19.05	45.72	38.10	6
150269	● Brown	38.10	6.35	20.32	33.02	19.05	45.72	38.10	6
150337	● Green	38.10	6.35	20.32	33.02	19.05	45.72	38.10	6
150336	● Orange	38.10	6.35	20.32	33.02	19.05	45.72	38.10	6
150362	● Purple	38.10	6.35	20.32	33.02	19.05	45.72	38.10	6
150270	● Red	38.10	6.35	20.32	33.02	19.05	45.72	38.10	6
150292	○ White	38.10	6.35	20.32	33.02	19.05	45.72	38.10	6
150225	● Yellow	38.10	6.35	20.32	33.02	19.05	45.72	38.10	6
Shackle Clearance 76.20 mm / KD - Keyed Differently / pack of 1									
150274	● Black	76.20	6.35	20.32	33.02	19.05	45.72	38.10	1
150249	● Blue	76.20	6.35	20.32	33.02	19.05	45.72	38.10	1
150247	● Brown	76.20	6.35	20.32	33.02	19.05	45.72	38.10	1
150319	● Green	76.20	6.35	20.32	33.02	19.05	45.72	38.10	1
150248	● Orange	76.20	6.35	20.32	33.02	19.05	45.72	38.10	1
150233	● Purple	76.20	6.35	20.32	33.02	19.05	45.72	38.10	1
150357	● Red	76.20	6.35	20.32	33.02	19.05	45.72	38.10	1
150295	○ White	76.20	6.35	20.32	33.02	19.05	45.72	38.10	1
150296	● Yellow	76.20	6.35	20.32	33.02	19.05	45.72	38.10	1

All these padlocks meet the ATEX Equipment Directive.



PrintFace

Print a face or any other personalisation in high resolution directly on the padlock, because safety is personal.



SafeKey nylon padlocks with plastic shackle

- Lightweight non-sparking nylon body with polymer plastic shackle that's non-conductive and non-sparking
- Non-conductive locking mechanism
- Ribbed design for safe handling
- Ideal for electrical applications or general lockout applications

1 key supplied for each padlock. Custom keying options available. Supplied with padlock labels in English, French and Spanish. Engraving on front, back, sides & key.

Order Reference	Colour	Shackle Clearance (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Quantity
Shackle Clearance 38.10 mm / KA - Keyed Alike / pack of 3									
150315	● Black	38.10	6.35	20.32	33.00	19.05	45.72	38.10	3
150268	● Blue	38.10	6.35	20.32	33.00	19.05	45.72	38.10	3
150314	● Brown	38.10	6.35	20.32	33.00	19.05	45.72	38.10	3
150223	● Green	38.10	6.35	20.32	33.00	19.05	45.72	38.10	3
150222	● Orange	38.10	6.35	20.32	33.00	19.05	45.72	38.10	3
150353	● Purple	38.10	6.35	20.32	33.00	19.05	45.72	38.10	3
150291*	● Red	38.10	6.35	20.32	33.00	19.05	45.72	38.10	3
150267	○ White	38.10	6.35	20.32	33.00	19.05	45.72	38.10	3
150290	● Yellow	38.10	6.35	20.32	33.00	19.05	45.72	38.10	3
Shackle Clearance 38.10 mm / KD - Keyed Differently / pack of 1									
150231	● Black	38.10	6.35	20.32	33.00	19.05	45.72	38.10	1
150366	● Blue	38.10	6.35	20.32	33.00	19.05	45.72	38.10	1
150318	● Brown	38.10	6.35	20.32	33.00	19.05	45.72	38.10	1
150273	● Green	38.10	6.35	20.32	33.00	19.05	45.72	38.10	1
150230	● Orange	38.10	6.35	20.32	33.00	19.05	45.72	38.10	1
150272	● Purple	38.10	6.35	20.32	33.00	19.05	45.72	38.10	1
150342*	● Red	38.10	6.35	20.32	33.00	19.05	45.72	38.10	1
150365	○ White	38.10	6.35	20.32	33.00	19.05	45.72	38.10	1
150232	● Yellow	38.10	6.35	20.32	33.00	19.05	45.72	38.10	1
Shackle Clearance 38.10 mm / KD - Keyed Differently / pack of 6									
150351	● Black	38.10	6.35	20.32	33.00	19.05	45.72	38.10	6
150221	● Blue	38.10	6.35	20.32	33.00	19.05	45.72	38.10	6
150309	● Brown	38.10	6.35	20.32	33.00	19.05	45.72	38.10	6
150334	● Green	38.10	6.35	20.32	33.00	19.05	45.72	38.10	6
150310	● Orange	38.10	6.35	20.32	33.00	19.05	45.72	38.10	6
150350	● Purple	38.10	6.35	20.32	33.00	19.05	45.72	38.10	6
150311*	● Red	38.10	6.35	20.32	33.00	19.05	45.72	38.10	6
150308	○ White	38.10	6.35	20.32	33.00	19.05	45.72	38.10	6
150265	● Yellow	38.10	6.35	20.32	33.00	19.05	45.72	38.10	6

*This product meets the ATEX Equipment Directive.



Traditional Nylon Padlocks

With a variety of different shackle sizes, materials and colours!

- Comes standard with hardened steel shackle for enhanced security or with nylon shackle to cut off the electrical current from the shackle to the key
- Aluminium shackle available on request for a significant reduction in weight
- Available in 10 different colours
- Key retaining system (Key won't release until padlock shackle is correctly closed)
- Optional laser engraving*

Locks are supplied keyed different. 1 key supplied with each padlock.

Custom keying options available.

Supplied with padlock labels in English/French for Standard & Nylon and English/French and English/Spanish for Long Body.



Traditional Nylon Padlocks with hardened steel shackle



Consult the technical datasheet LOTO-8 on bradyeurope.com/tds



Order Reference	Colour	Shackle Clearance (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Quantity
051353	● Black	38.10	6.35	20.32	33.02	20.83	44.50	38.10	6
051344	● Blue	38.10	6.35	20.32	33.02	20.83	44.50	38.10	6
813636	● Brown	38.10	6.35	20.32	33.02	20.83	44.50	38.10	6
051345	● Green	38.10	6.35	20.32	33.02	20.83	44.50	38.10	6
814113	● Grey	38.10	6.35	20.32	33.02	20.83	44.50	38.10	6
051347	● Orange	38.10	6.35	20.32	33.02	20.83	44.50	38.10	6
813637	● Purple	38.10	6.35	20.32	33.02	20.83	44.50	38.10	6
051339	● Red	38.10	6.35	20.32	33.02	20.83	44.50	38.10	6
813638	○ White	38.10	6.35	20.32	33.02	20.83	44.50	38.10	6
051346	● Yellow	38.10	6.35	20.32	33.02	20.83	44.50	38.10	6

*Optional Engraving on front & back

Traditional Nylon Padlocks with nylon shackle



Consult the technical datasheet LOTO-6 on bradyeurope.com/tds



Order Reference	Colour	Shackle Clearance (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Quantity
813595	● Black	38.10	6.35	20.32	33.02	20.83	44.45	38.10	6
813593	● Blue	38.10	6.35	20.32	33.02	20.83	44.45	38.10	6
813639	● Brown	38.10	6.35	20.32	33.02	20.83	44.45	38.10	6
813597	● Green	38.10	6.35	20.32	33.02	20.83	44.45	38.10	6
814154	● Grey	38.10	6.35	20.32	33.02	20.83	44.45	38.10	6
813598	● Orange	38.10	6.35	20.32	33.02	20.83	44.45	38.10	6
813640	● Purple	38.10	6.35	20.32	33.02	20.83	44.45	38.10	6
813594**	● Red	38.10	6.35	20.32	33.02	20.83	44.45	38.10	6
813641	○ White	38.10	6.35	20.32	33.02	20.83	44.45	38.10	6
813596	● Yellow	38.10	6.35	20.32	33.02	20.83	44.45	38.10	6

*Optional Engraving on front & back

**These products meet the ATEX Equipment Directive.

Traditional Nylon Long Body Padlocks with hardened steel shackle



Order Reference	Colour	Shackle Clearance (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Quantity
834463	● Black	38.10	6.35	20.32	33.02	20.83	76.20	38.10	6
834462	● Blue	38.10	6.35	20.32	33.02	20.83	76.20	38.10	6
834466	● Green	38.10	6.35	20.32	33.02	20.83	76.20	38.10	6
834467	● Orange	38.10	6.35	20.32	33.02	20.83	76.20	38.10	6
834464	● Red	38.10	6.35	20.32	33.02	20.83	76.20	38.10	6
834465	● Yellow	38.10	6.35	20.32	33.02	20.83	76.20	38.10	6

Long Body version: Purple, Brown, Grey and White colours available upon request for large volumes.

*Optional Engraving on front, back & sides



SafeKey Nylon Compact Padlocks with plastic shackle




- Extremely compact and lightweight design
- Non-conductive and non-sparking nylon body and polymer shackle
- Non-conductive locking mechanism
- Ideal for electrical applications and small spaces
- Ribbed design for safe handling
- For electrical contractors, maintenance and electricians

1 key supplied for each padlock. Custom keying options available.
Supplied with padlock labels in English, French and Spanish.
Engraving on front, back, sides & key.



Consult the technical
datasheet LOTO-100 on
bradyeurope.com/tds

This compact safety padlock is perfect for small space applications and where lightweight and easy to carry locks are needed. For more durable applications consider the SafeKey nylon compact padlocks with aluminium shackle.



Order Reference	Colour	Shackle Clearance (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Quantity
Shackle Clearance 25.40 mm / KA - Keyed Alike / pack of 3									
150193	● Black	25.40	4.72	17.78	25.91	19.05	43.18	31.75	3
150192	● Blue	25.40	4.72	17.78	25.91	19.05	43.18	31.75	3
150196	● Brown	25.40	4.72	17.78	25.91	19.05	43.18	31.75	3
150191	● Green	25.40	4.72	17.78	25.91	19.05	43.18	31.75	3
150194	● Orange	25.40	4.72	17.78	25.91	19.05	43.18	31.75	3
150195	● Purple	25.40	4.72	17.78	25.91	19.05	43.18	31.75	3
150189	● Red	25.40	4.72	17.78	25.91	19.05	43.18	31.75	3
150197	○ White	25.40	4.72	17.78	25.91	19.05	43.18	31.75	3
150190	● Yellow	25.40	4.72	17.78	25.91	19.05	43.18	31.75	3
Shackle Clearance 25.40 mm / KD - Keyed Differently / pack of 1									
150184	● Black	25.40	4.72	17.78	25.91	19.05	43.18	31.75	1
150183	● Blue	25.40	4.72	17.78	25.91	19.05	43.18	31.75	1
150187	● Brown	25.40	4.72	17.78	25.91	19.05	43.18	31.75	1
150182	● Green	25.40	4.72	17.78	25.91	19.05	43.18	31.75	1
150185	● Orange	25.40	4.72	17.78	25.91	19.05	43.18	31.75	1
150186	● Purple	25.40	4.72	17.78	25.91	19.05	43.18	31.75	1
150180	● Red	25.40	4.72	17.78	25.91	19.05	43.18	31.75	1
150188	○ White	25.40	4.72	17.78	25.91	19.05	43.18	31.75	1
150181	● Yellow	25.40	4.72	17.78	25.91	19.05	43.18	31.75	1
Shackle Clearance 25.40 mm / KD - Keyed Differently / pack of 6									
150211	● Black	25.40	4.72	17.78	25.91	19.05	43.18	31.75	6
150210	● Blue	25.40	4.72	17.78	25.91	19.05	43.18	31.75	6
150214	● Brown	25.40	4.72	17.78	25.91	19.05	43.18	31.75	6
150209	● Green	25.40	4.72	17.78	25.91	19.05	43.18	31.75	6
150212	● Orange	25.40	4.72	17.78	25.91	19.05	43.18	31.75	6
150213	● Purple	25.40	4.72	17.78	25.91	19.05	43.18	31.75	6
150207	● Red	25.40	4.72	17.78	25.91	19.05	43.18	31.75	6
150215	○ White	25.40	4.72	17.78	25.91	19.05	43.18	31.75	6
150208	● Yellow	25.40	4.72	17.78	25.91	19.05	43.18	31.75	6





PrintFace

Print a face or any other personalisation in high resolution directly on the padlock, because safety is personal.

SafeKey nylon compact padlocks with aluminium shackle

- Extremely compact and lightweight design
- Non-conductive and non-sparking nylon body
- Non-conductive locking mechanism
- Ideal for electrical applications and small spaces
- Ribbed design for safe handling
- For electrical contractors, maintenance and electricians

1 key supplied for each padlock. Custom keying options available.
Supplied with padlock labels in English, French and Spanish.
Engraving on front, back, sides & key.

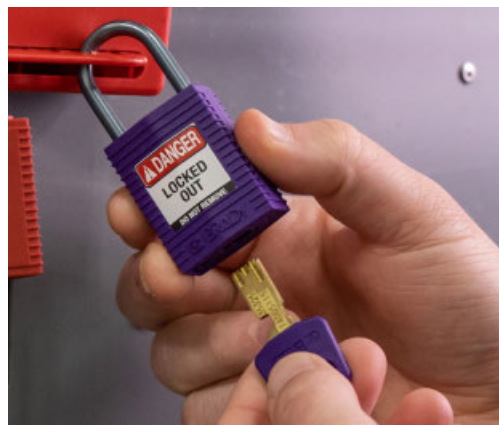

Order Reference	Colour	Shackle Clearance (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Quantity
Shackle Clearance 25.40 mm / KD - Keyed Differently / pack of 1									
152159	● Black	25.40	4.72	17.78	25.91	19.05	41.91	31.75	1
152158	● Blue	25.40	4.70	17.78	25.91	19.05	41.91	31.75	1
152162	● Brown	25.40	4.70	17.78	25.91	19.05	41.91	31.75	1
152157	● Green	25.40	4.70	17.78	25.91	19.05	41.91	31.75	1
152160	● Orange	25.40	4.70	17.78	25.91	19.05	41.91	31.75	1
152161	● Purple	25.40	4.70	17.78	25.91	19.05	41.91	31.75	1
152155	● Red	25.40	4.70	17.78	25.91	19.05	41.91	31.75	1
152163	○ White	25.40	4.70	17.78	25.91	19.05	41.91	31.75	1
152156	● Yellow	25.40	4.70	17.78	25.91	19.05	41.91	31.75	1
Shackle Clearance 25.40 mm / KD - Keyed Differently / pack of 6									
152168	● Black	25.40	4.70	17.78	25.91	19.05	41.91	31.75	6
152167	● Blue	25.40	4.70	17.78	25.91	19.05	41.91	31.75	6
152171	● Brown	25.40	4.70	17.78	25.91	19.05	41.91	31.75	6
152166	● Green	25.40	4.70	17.78	25.91	19.05	41.91	31.75	6
152169	● Orange	25.40	4.70	17.78	25.91	19.05	41.91	31.75	6
152170	● Purple	25.40	4.70	17.78	25.91	19.05	41.91	31.75	6
152164	● Red	25.40	4.70	17.78	25.91	19.05	41.91	31.75	6
152172	○ White	25.40	4.70	17.78	25.91	19.05	41.91	31.75	6
152165	● Yellow	25.40	4.70	17.78	25.91	19.05	41.91	31.75	6
Shackle Clearance 38.10 mm / KD - Keyed Differently / pack of 1									
151659	● Black	38.10	4.70	17.78	25.91	19.05	41.91	31.75	1
151658	● Blue	38.10	4.70	17.78	25.91	19.05	41.91	31.75	1
151662	● Brown	38.10	4.70	17.78	25.91	19.05	41.91	31.75	1
151657	● Green	38.10	4.70	17.78	25.91	19.05	41.91	31.75	1
151660	● Orange	38.10	4.70	17.78	25.91	19.05	41.91	31.75	1
151661	● Purple	38.10	4.70	17.78	25.91	19.05	41.91	31.75	1
151655	● Red	38.10	4.70	17.78	25.91	19.05	41.91	31.75	1
151663	○ White	38.10	4.70	17.78	25.91	19.05	41.91	31.75	1
151656	● Yellow	38.10	4.70	17.78	25.91	19.05	41.91	31.75	1
Shackle Clearance 38.10 mm / KD - Keyed Differently / pack of 6									
151668	● Black	38.10	4.70	17.78	25.91	19.05	41.91	31.75	6
151667	● Blue	38.10	4.70	17.78	25.91	19.05	41.91	31.75	6
151671	● Brown	38.10	4.70	17.78	25.91	19.05	41.91	31.75	6
151666	● Green	38.10	4.70	17.78	25.91	19.05	41.91	31.75	6
151669	● Orange	38.10	4.70	17.78	25.91	19.05	41.91	31.75	6
151670	● Purple	38.10	4.70	17.78	25.91	19.05	41.91	31.75	6
151664	● Red	38.10	4.70	17.78	25.91	19.05	41.91	31.75	6
151672	○ White	38.10	4.70	17.78	25.91	19.05	41.91	31.75	6
151665	● Yellow	38.10	4.70	17.78	25.91	19.05	41.91	31.75	6

Traditional Nylon Compact Padlocks



Traditional Nylon Compact Padlocks

Compact & Lightweight padlocks - easy to use for effective energy control!

- Non-conductive nylon body and aluminium shackle
- Minimum weight for padlock is only 40 g
- Key retaining system
- Maximum Operation Temperature 120 °C
- Colour coding allows for easy identification of Lockout teams during maintenance programmes
- Small shackle diameter ideal for lockout ready equipment with 5 mm holes
- Optional Laser Engraving on front, back & sides


Locks are supplied keyed different. 1 key supplied with each padlock.

Custom keying options available. Supplied with Padlock labels in English/French.

The compact safety padlock is perfect for small space applications and where lightweight and easy to carry locks are needed. For even more durable applications, please refer to Brady's range of padlocks with 6.50 mm diam shackles for more durability.



Consult the technical datasheet LOTO-9 on bradyeurope.com/tds

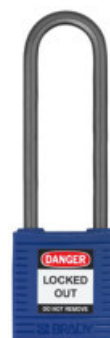

Order Reference	Colour	Shackle Clearance (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Quantity
Shackle Clearance 25.40 mm									
814115	● Black	25.40	4.72	17.00	25.91	16.00	35.00	32.00	6
814114	● Blue	25.40	4.72	17.00	25.91	16.00	35.00	32.00	6
814120	● Brown	25.40	4.72	17.00	25.91	16.00	35.00	32.00	6
814118	● Green	25.40	4.72	17.00	25.91	16.00	35.00	32.00	6
814123	● Grey	25.40	4.72	17.00	25.91	16.00	35.00	32.00	6
814119	● Orange	25.40	4.72	17.00	25.91	16.00	35.00	32.00	6
814121	● Purple	25.40	4.72	17.00	25.91	16.00	35.00	32.00	6
814116*	● Red	25.40	4.72	17.00	25.91	16.00	35.00	32.00	6
814122	○ White	25.40	4.72	17.00	25.91	16.00	35.00	32.00	6
814117	● Yellow	25.40	4.72	17.00	25.91	16.00	35.00	32.00	6
Shackle Clearance 38.10 mm									
814125	● Black	38.10	4.72	17.00	25.91	16.00	35.00	32.00	6
814124	● Blue	38.10	4.72	17.00	25.91	16.00	35.00	32.00	6
814130	● Brown	38.10	4.72	17.00	25.91	16.00	35.00	32.00	6
814128	● Green	38.10	4.72	17.00	25.91	16.00	35.00	32.00	6
814133	● Grey	38.10	4.72	17.00	25.91	16.00	35.00	32.00	6
814129	● Orange	38.10	4.72	17.00	25.91	16.00	35.00	32.00	6
814131	● Purple	38.10	4.72	17.00	25.91	16.00	35.00	32.00	6
814126*	● Red	38.10	4.72	17.00	25.91	16.00	35.00	32.00	6
814132	○ White	38.10	4.72	17.00	25.91	16.00	35.00	32.00	6
814127	● Yellow	38.10	4.72	17.00	25.91	16.00	35.00	32.00	6
Shackle Clearance 50.80 mm									
814135	● Black	50.80	4.72	17.00	25.91	16.00	35.00	32.00	6
814134	● Blue	50.80	4.72	17.00	25.91	16.00	35.00	32.00	6
814140	● Brown	50.80	4.72	17.00	25.91	16.00	35.00	32.00	6
814138	● Green	50.80	4.72	17.00	25.91	16.00	35.00	32.00	6
814143	● Grey	50.80	4.72	17.00	25.91	16.00	35.00	32.00	6
814139	● Orange	50.80	4.72	17.00	25.91	16.00	35.00	32.00	6
814141	● Purple	50.80	4.72	17.00	25.91	16.00	35.00	32.00	6
814136*	● Red	50.80	4.72	17.00	25.91	16.00	35.00	32.00	6
814142	○ White	50.80	4.72	17.00	25.91	16.00	35.00	32.00	6
814137	● Yellow	50.80	4.72	17.00	25.91	16.00	35.00	32.00	6
Shackle Clearance 76.20 mm									
814145	● Black	76.20	4.72	17.00	25.91	16.00	35.00	32.00	6
814144	● Blue	76.20	4.72	17.00	25.91	16.00	35.00	32.00	6
814150	● Brown	76.20	4.72	17.00	25.91	16.00	35.00	32.00	6
814148	● Green	76.20	4.72	17.00	25.91	16.00	35.00	32.00	6
814153	● Grey	76.20	4.72	17.00	25.91	16.00	35.00	32.00	6
814149	● Orange	76.20	4.72	17.00	25.91	16.00	35.00	32.00	6
814151	● Purple	76.20	4.72	17.00	25.91	16.00	35.00	32.00	6
814146*	● Red	76.20	4.72	17.00	25.91	16.00	35.00	32.00	6
814152	○ White	76.20	4.72	17.00	25.91	16.00	35.00	32.00	6
814147	● Yellow	76.20	4.72	17.00	25.91	16.00	35.00	32.00	6

*This product meets the ATEX Equipment Directive

Traditional Nylon Compact Cable Padlocks

Compact & Lightweight padlocks - easy to use for effective energy control!

- Non-conductive nylon body and PVC encased steel cable
- Minimum weight for padlock is only 40 g
- Key retaining system
- Maximum Operation Temperature 120 °C
- Small cable diameter ideal for lockout ready equipment with 5 mm holes close to each other
- Optional Laser Engraving on front, back & sides

Locks are supplied keyed different or keyed alike. 1 key supplied with each padlock.
Custom keying options available. Supplied with Padlock labels in English/French.



Consult the technical
datasheet LOTO-77 on
bradyeurope.com/tds



Order Reference	Colour	Shackle Clearance (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Quantity
Cable length 200 mm									
KA - Keyed Alike									
146128	Red	108.00	4.72	17.50	26.00	16.00	35.00	32.00	6
146129	Yellow	108.00	4.72	17.50	26.00	16.00	35.00	32.00	6
146130	Blue	108.00	4.72	17.50	26.00	16.00	35.00	32.00	6
146131	Green	108.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195946	Black	108.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195947	Brown	108.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195948	Grey	108.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195949	Orange	108.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195950	Purple	108.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195951	White	108.00	4.72	17.50	26.00	16.00	35.00	32.00	6
KD - Keyed Differently									
146120	Red	108.00	4.72	17.50	26.00	16.00	35.00	32.00	1
146121	Yellow	108.00	4.72	17.50	26.00	16.00	35.00	32.00	1
146122	Blue	108.00	4.72	17.50	26.00	16.00	35.00	32.00	1
146123	Green	108.00	4.72	17.50	26.00	16.00	35.00	32.00	1
195934	Black	108.00	4.72	17.50	26.00	16.00	35.00	32.00	1
195935	Brown	108.00	4.72	17.50	26.00	16.00	35.00	32.00	1
195936	Grey	108.00	4.72	17.50	26.00	16.00	35.00	32.00	1
195937	Orange	108.00	4.72	17.50	26.00	16.00	35.00	32.00	1
195938	Purple	108.00	4.72	17.50	26.00	16.00	35.00	32.00	1
195939	White	108.00	4.72	17.50	26.00	16.00	35.00	32.00	1
195972	Red	108.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195973	Yellow	108.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195974	Blue	108.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195975	Green	108.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195980	Black	108.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195981	Brown	108.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195982	Grey	108.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195983	Orange	108.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195984	Purple	108.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195985	White	108.00	4.72	17.50	26.00	16.00	35.00	32.00	6
Cable length 400 mm									
KA - Keyed Alike									
146132	Red	216.00	4.72	17.50	26.00	16.00	35.00	32.00	6
146133	Yellow	216.00	4.72	17.50	26.00	16.00	35.00	32.00	6
146134	Blue	216.00	4.72	17.50	26.00	16.00	35.00	32.00	6
146135	Green	216.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195952	Black	216.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195953	Brown	216.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195954	Grey	216.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195955	Orange	216.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195956	Purple	216.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195957	White	216.00	4.72	17.50	26.00	16.00	35.00	32.00	6
KD - Keyed Differently									
146124	Red	216.00	4.72	17.50	26.00	16.00	35.00	32.00	1
146125	Yellow	216.00	4.72	17.50	26.00	16.00	35.00	32.00	1
146126	Blue	216.00	4.72	17.50	26.00	16.00	35.00	32.00	1
146127	Green	216.00	4.72	17.50	26.00	16.00	35.00	32.00	1
195940	Black	216.00	4.72	17.50	26.00	16.00	35.00	32.00	1
195941	Brown	216.00	4.72	17.50	26.00	16.00	35.00	32.00	1
195942	Grey	216.00	4.72	17.50	26.00	16.00	35.00	32.00	1
195943	Orange	216.00	4.72	17.50	26.00	16.00	35.00	32.00	1
195944	Purple	216.00	4.72	17.50	26.00	16.00	35.00	32.00	1
195945	White	216.00	4.72	17.50	26.00	16.00	35.00	32.00	1
195976	Red	216.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195977	Yellow	216.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195978	Blue	216.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195979	Green	216.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195986	Black	216.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195987	Brown	216.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195988	Grey	216.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195989	Orange	216.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195990	Purple	216.00	4.72	17.50	26.00	16.00	35.00	32.00	6
195991	White	216.00	4.72	17.50	26.00	16.00	35.00	32.00	6



Consult the technical datasheet LOTO-73 on bradyeurope.com/tds

Safety Security Padlocks


Nylon encased aluminium body with nylon encased steel shackle

- Solid aluminium core with steel shackle for best physical strength
- Body and shackle insulated against electric shock
- NANO PROTECT™ shackle for superior corrosion resistance
- Intrinsically safe
- Automatic locking for user convenience
- Compact and lightweight
- High precision 6-pin cylinder for better tamper-resistance
- Long Body version available on request (bilingual labelling)
- Key retaining system (Key won't release until padlock shackle is correctly closed, non-key retaining available upon request)
- Optional Engraving on front, back & sides

Locks are supplied keyed different. 1 key supplied with each padlock.


Custom keying options available.

Supplied with Padlock labels in English/French/Spanish.



Order Reference	Colour	Shackle Clearance (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Quantity
Shackle Clearance 38 mm									
834469	● Black	38.00	6.50	19.00	32.00	20.00	45.50	40.00	6
834468	● Blue	38.00	6.50	19.00	32.00	20.00	45.50	40.00	6
834472	● Green	38.00	6.50	19.00	32.00	20.00	45.50	40.00	6
834473	● Orange	38.00	6.50	19.00	32.00	20.00	45.50	40.00	6
834470	● Red	38.00	6.50	19.00	32.00	20.00	45.50	40.00	6
834471	● Yellow	38.00	6.50	19.00	32.00	20.00	45.50	40.00	6
Shackle Clearance 75 mm									
834475	● Black	75.00	6.50	19.00	32.00	20.00	45.50	40.00	6
834474	● Blue	75.00	6.50	19.00	32.00	20.00	45.50	40.00	6
834478	● Green	75.00	6.50	19.00	32.00	20.00	45.50	40.00	6
834479	● Orange	75.00	6.50	19.00	32.00	20.00	45.50	40.00	6
834476	● Red	75.00	6.50	19.00	32.00	20.00	45.50	40.00	6
834477	● Yellow	75.00	6.50	19.00	32.00	20.00	45.50	40.00	6

Purple, Brown, Grey and White colours available upon request for large volumes.

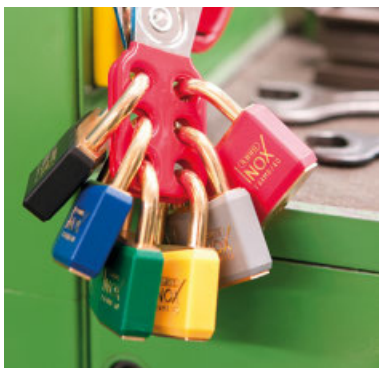

Consult the technical datasheet LOTO-13 on bradyeurope.com/tds




Brass Padlocks

Locks that will never rust

- Solid brass body and shackle
- Spark resistant ideal for use in flammable environments
- Corrosion resistant
- 6-pin cylinder offers more unique key cuts, better tamper-resistance
- Locks protected by coloured vinyl sheaths
- Non-key retaining, key retaining upon request (Key won't release until padlock shackle is correctly closed)
- Optional Engraving on bottom & key

Locks are supplied keyed different. Two keys supplied with each padlock.

Custom keying options available.



Order Reference	Colour	Shackle Clearance (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Quantity
051359	● Black	21.08	6.35	20.60	33.50	16.75	32.00	43.30	12
051355	● Blue	21.08	6.35	20.60	33.50	16.75	32.00	43.30	12
051356	● Green	21.08	6.35	20.60	33.50	16.75	32.00	43.30	12
051358	● Grey	21.08	6.35	20.60	33.50	16.75	32.00	43.30	12
051354*	● Red	21.08	6.35	20.60	33.50	16.75	32.00	43.30	12
051357	● Yellow	21.08	6.35	20.60	33.50	16.75	32.00	43.30	12

*This product meets the ATEX Equipment Directive.

SafeKey aluminum padlocks with steel shackle

- Aluminum padlock with steel shackle provides corrosion resistance
- Non-conductive locking mechanism
- Ideal for indoor and outdoor use, and heavy-duty applications
- Not key-retaining

1 key supplied for each padlock.
Custom keying options available.



Order Reference	Colour	Shackle Clearance (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Quantity
Shackle Clearance 38.10 mm / KA - Keyed Alike / pack of 3									
150349	● Black	38.10	6.35	20.32	33.05	19.05	46.00	38.10	3
150261	● Blue	38.10	6.35	20.32	33.05	19.05	46.00	38.10	3
150260	● Brown	38.10	6.35	20.32	33.05	19.05	46.00	38.00	3
150281	● Green	38.10	6.35	20.32	33.05	19.05	46.00	38.10	3
150305	● Orange	38.10	6.35	20.32	33.05	19.05	46.00	38.10	3
150348	● Purple	38.10	6.35	20.32	33.05	19.05	46.00	38.10	3
150262	● Red	38.10	6.35	20.32	33.05	19.05	46.00	38.10	3
150304	● Silver	38.10	6.35	20.32	33.05	19.05	46.00	38.10	3
150282	● Yellow	38.10	6.35	20.32	33.05	19.05	46.00	38.10	3
Shackle Clearance 38.10 mm / KD - Keyed Differently / pack of 1									
150243	● Black	38.10	6.35	20.32	33.05	19.05	46.00	38.00	1
150287	● Blue	38.10	6.35	20.32	33.05	19.05	46.00	38.10	1
150286	● Brown	38.10	6.35	20.32	33.05	19.05	46.00	38.10	1
150264	● Green	38.10	6.35	20.32	33.05	19.05	46.00	38.10	1
150263	● Orange	38.10	6.35	20.32	33.05	19.05	46.00	38.10	1
150333	● Purple	38.10	6.35	20.32	33.05	19.05	46.00	38.10	1
150307	● Red	38.10	6.35	20.32	33.05	19.05	46.00	38.10	1
150242	● Silver	38.10	6.35	20.32	33.05	19.05	46.00	38.00	1
150288	● Yellow	38.10	6.35	20.32	33.05	19.05	46.00	38.10	1
Shackle Clearance 38.10 mm / KD - Keyed Differently / pack of 6									
150240	● Black	38.10	6.35	20.32	33.05	19.05	46.00	38.00	6
150302	● Blue	38.10	6.35	20.32	33.05	19.05	46.00	38.10	6
150301	● Brown	38.10	6.35	20.32	33.05	19.05	46.00	38.10	6
150256	● Green	38.10	6.35	20.32	33.05	19.05	46.00	38.00	6
150326	● Orange	38.10	6.35	20.32	33.05	19.05	46.00	38.10	6
150347	● Purple	38.10	6.35	20.32	33.05	19.05	46.00	38.10	6
150303	● Red	38.10	6.35	20.32	33.05	19.05	46.00	38.10	6
150278	● Silver	38.10	6.35	20.32	33.05	19.05	46.00	38.10	6
150219	● Yellow	38.10	6.35	20.32	33.05	19.05	46.00	38.00	6
Shackle Clearance 76.20 mm / KA - Keyed Alike / pack of 3									
150217	● Black	76.20	6.35	20.32	33.05	19.05	46.00	38.10	3
150277	● Blue	76.20	6.35	20.32	33.05	19.05	46.00	38.10	3
150299	● Brown	76.20	6.35	20.32	33.05	19.05	46.00	38.10	3
150238	● Green	76.20	6.35	20.32	33.05	19.05	46.00	38.10	3
150325	● Orange	76.20	6.35	20.32	33.05	19.05	46.00	38.10	3
150300	● Purple	76.20	6.35	20.32	33.05	19.05	46.00	38.10	3
150218	● Red	76.20	6.35	20.32	33.05	19.05	46.00	38.10	3
150276	● Silver	76.20	6.35	20.32	33.05	19.05	46.00	38.10	3
150239	● Yellow	76.20	6.35	20.32	33.05	19.05	46.00	38.10	3
Shackle Clearance 76.20 mm / KD - Keyed Differently / pack of 1									
150331	● Black	76.20	6.35	20.32	33.05	19.05	46.00	38.10	1
150241	● Blue	76.20	6.35	20.32	33.05	19.05	46.00	38.10	1
150284	● Brown	76.20	6.35	20.32	33.05	19.05	46.00	38.10	1
150360	● Green	76.20	6.35	20.32	33.05	19.05	46.00	38.10	1
150306	● Orange	76.20	6.35	20.32	33.05	19.05	46.00	38.10	1
150330	● Purple	76.20	6.35	20.32	33.05	19.05	46.00	38.10	1
150332	● Red	76.20	6.35	20.32	33.05	19.05	46.00	38.10	1
150283	● Silver	76.20	6.35	20.32	33.05	19.05	46.00	38.10	1
150285	● Yellow	76.20	6.35	20.32	33.05	19.05	46.00	38.10	1
Shackle Clearance 76.20 mm / KD - Keyed Differently / pack of 6									
150216	● Black	76.20	6.35	20.32	33.05	19.05	46.00	38.10	6
150322	● Blue	76.20	6.35	20.32	33.05	19.05	46.00	38.10	6
150235	● Brown	76.20	6.35	20.32	33.05	19.05	46.00	38.10	6
150252	● Green	76.20	6.35	20.32	33.05	19.05	46.00	38.10	6
150344	● Orange	76.20	6.35	20.32	33.05	19.05	46.00	38.10	6
150358	● Purple	76.20	6.35	20.32	33.05	19.05	46.00	38.10	6
150323	● Red	76.20	6.35	20.32	33.05	19.05	46.00	38.10	6
150297	● Silver	76.20	6.35	20.32	33.05	19.05	46.00	38.10	6
150345	● Yellow	76.20	6.35	20.32	33.05	19.05	46.00	38.10	6





Traditional Full Aluminium Padlocks

Manufactured with solid aluminium body and shackle, our padlocks are amazingly lightweight and easy to use

- Solid anodised aluminium body
- Supplied with aluminium shackle
- Hardened steel or stainless steel shackle available on request
- Corrosion resistance
- Optional Engraving on front, back, sides, bottom & key
- Lock labels sold separately. See page 38
- Non-key retaining, key retaining upon request
(Key won't release until padlock shackle is correctly closed)

Padlocks are supplied keyed different.

2 keys supplied with each lock, NOT key retaining.

Custom keying and charting is available.



Consult the technical
datasheet LOTO-10 on
bradyeurope.com/tds



Order Reference	Colour	Shackle Clearance (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Quantity
Shackle Height 25.40 mm									
814067	● Black	25.40	6.35	18.80	31.50	19.05	40.00	38.10	6
814065	● Blue	25.40	6.35	18.80	31.50	19.05	40.00	38.10	6
830939	● Brown	25.40	6.35	18.80	31.50	19.05	40.00	38.10	6
814069	● Green	25.40	6.35	18.80	31.50	19.05	40.00	38.10	6
830936	● Grey	25.40	6.35	18.80	31.50	19.05	40.00	38.10	6
814070	● Orange	25.40	6.35	18.80	31.50	19.05	40.00	38.10	6
814071	● Purple	25.40	6.35	18.80	31.50	19.05	40.00	38.10	6
814066	● Red	25.40	6.35	18.80	31.50	19.05	40.00	38.10	6
814068	● Yellow	25.40	6.35	18.80	31.50	19.05	40.00	38.10	6
Shackle Height 38.10 mm									
814074	● Black	38.10	6.35	20.00	31.50	19.05	40.00	38.10	6
814072	● Blue	38.10	6.35	20.00	31.50	19.05	40.00	38.10	6
830940	● Brown	38.10	6.35	20.00	31.50	19.05	40.00	38.10	6
814076	● Green	38.10	6.35	20.00	31.50	19.05	40.00	38.10	6
830937	● Grey	38.10	6.35	20.00	31.50	19.05	40.00	38.10	6
814077	● Orange	38.10	6.35	20.00	31.50	19.05	40.00	38.10	6
814078	● Purple	38.10	6.35	20.00	31.50	19.05	40.00	38.10	6
814073	● Red	38.10	6.35	20.00	31.50	19.05	40.00	38.10	6
814075	● Yellow	38.10	6.35	20.00	31.50	19.05	40.00	38.10	6
Shackle Height 76.20 mm									
814081	● Black	76.20	6.35	20.00	31.50	19.05	40.00	38.10	6
814079	● Blue	76.20	6.35	20.00	31.50	19.05	40.00	38.10	6
830941	● Brown	76.20	6.35	20.00	31.50	19.05	40.00	38.10	6
814083	● Green	76.20	6.35	20.00	31.50	19.05	40.00	38.10	6
830938	● Grey	76.20	6.35	20.00	31.50	19.05	40.00	38.10	6
814084	● Orange	76.20	6.35	20.00	31.50	19.05	40.00	38.10	6
814085	● Purple	76.20	6.35	20.00	31.50	19.05	40.00	38.10	6
814080	● Red	76.20	6.35	20.00	31.50	19.05	40.00	38.10	6
814082	● Yellow	76.20	6.35	20.00	31.50	19.05	40.00	38.10	6



Visit our YouTube™ channel for a range of available training videos.



Traditional Aluminium Compact Padlocks

Lightweight and easy to use, ideal for small spaces





- Solid anodised aluminium body
- Supplied with aluminium shackle
- Corrosion resistance
- Engraving on front, back & sides

Padlocks are supplied keyed different. 1 key supplied with each lock.
Custom keying and charting is available.




The compact aluminium padlock is perfect for small space applications and where lightweight and easy to carry locks are needed. For even more durable applications, please refer to Brady's range of padlocks with 6.50 mm diameter shackles for more durability.



										
Order Reference	Colour	Shackle Clearance (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Quantity	
Shackle Clearance 25 mm										
834857	● Black	25.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
834856	● Blue	25.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
834860	● Green	25.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
834861	● Orange	25.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
834858	● Red	25.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
834859	● Yellow	25.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
Shackle Clearance 40 mm										
834863	● Black	40.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
834862	● Blue	40.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
834866	● Green	40.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
834867	● Orange	40.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
834864	● Red	40.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
834865	● Yellow	40.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
Shackle Clearance 50 mm										
834869	● Black	50.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
834868	● Blue	50.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
834872	● Green	50.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
834873	● Orange	50.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
834870	● Red	50.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
834871	● Yellow	50.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
Shackle Clearance 75 mm										
834875	● Black	75.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
834874	● Blue	75.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
834878	● Green	75.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
834879	● Orange	75.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
834876	● Red	75.00	4.75	17.00	26.00	16.00	35.25	32.00	6	
834877	● Yellow	75.00	4.75	17.00	26.00	16.00	35.25	32.00	6	



Purple, brown and silver colours available upon request for large volumes.

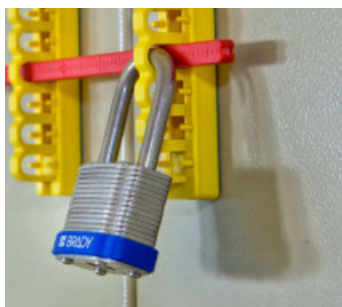

Consult the technical
datasheet LOTO-11 on
bradyeurope.com/tds

Laminated Steel Padlocks

Reinforced laminated steel withstands severe physical abuse
and hardened steel shackle is difficult to cut.

- Body plates individually coated for superior rust protection
- 5-pin cylinder offers more unique key cuts, better tamper-resistance than conventional 4-pin locks
- Coloured bumpers supplied for identification and protection
- Key retaining system (Key won't release until padlock shackle is closed)
- Optional Engraving on bottom & key
- Lock labels sold separately. See page 38

Padlocks are supplied keyed different. 1 key supplied with each lock.
Custom keying and charting is available.




Order Reference	Colour	Shackle Height (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Quantity
Shackle Height 20.32 mm									
814087	● Black	20.32	6.35	18.50	31.20	25.40	27.94	43.18	6
814086	● Blue	20.32	6.35	18.50	31.20	25.40	27.94	43.18	6
814092	● Brown	20.32	6.35	18.50	31.20	25.40	27.94	43.18	6
814090	● Green	20.32	6.35	18.50	31.20	25.40	27.94	43.18	6
814091	● Orange	20.32	6.35	18.50	31.20	25.40	27.94	43.18	6
814093	● Purple	20.32	6.35	18.50	31.20	25.40	27.94	43.18	6
814088	● Red	20.32	6.35	18.50	31.20	25.40	27.94	43.18	6
814094	○ White	20.32	6.35	18.50	31.20	25.40	27.94	43.18	6
814089	● Yellow	20.32	6.35	18.50	31.20	25.40	27.94	43.18	6
Shackle Height 38.10 mm									
814096	● Black	38.10	6.35	18.50	31.20	25.40	27.94	43.18	6
814095	● Blue	38.10	6.35	18.50	31.20	25.40	27.94	43.18	6
814101	● Brown	38.10	6.35	18.50	31.20	25.40	27.94	43.18	6
814099	● Green	38.10	6.35	18.50	31.20	25.40	27.94	43.18	6
814100	● Orange	38.10	6.35	18.50	31.20	25.40	27.94	43.18	6
814102	● Purple	38.10	6.35	18.50	31.20	25.40	27.94	43.18	6
814097	● Red	38.10	6.35	18.50	31.20	25.40	27.94	43.18	6
814103	○ White	38.10	6.35	18.50	31.20	25.40	27.94	43.18	6
814098	● Yellow	38.10	6.35	18.50	31.20	25.40	27.94	43.18	6
Shackle Height 50.80 mm									
814105	● Black	50.80	6.35	18.50	31.20	25.40	27.94	43.18	6
814104	● Blue	50.80	6.35	18.50	31.20	25.40	27.94	43.18	6
814110	● Brown	50.80	6.35	18.50	31.20	25.40	27.94	43.18	6
814108	● Green	50.80	6.35	18.50	31.20	25.40	27.94	43.18	6
814109	● Orange	50.80	6.35	18.50	31.20	25.40	27.94	43.18	6
814111	● Purple	50.80	6.35	18.50	31.20	25.40	27.94	43.18	6
814106	● Red	50.80	6.35	18.50	31.20	25.40	27.94	43.18	6
814112	○ White	50.80	6.35	18.50	31.20	25.40	27.94	43.18	6
814107	● Yellow	50.80	6.35	18.50	31.20	25.40	27.94	43.18	6



Ultimate Security Padlocks

- Shackle and body made of highest standard hardened alloy steel
- Abus-Plus 7 pin disk cylinder for ultimate protection against manipulation and key interchanges
- Optional Engraving on bottom & key

Padlocks are supplied keyed different. 2 keys supplied with each lock.
Custom keying and charting is available.



Order Reference	Colour	Shackle Height (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Quantity
805837	● Black	26.50	11.00	27.50	49.50	31.00	46.50	62.50	2
805838	● Black	50.00	11.00	27.50	49.50	31.00	46.50	62.50	2
805839	● Black	75.00	11.00	27.50	49.50	31.00	46.50	62.50	1

Fully insulated padlocks

Body and shackle fully insulated against electric shock

- Solid brass body
- Sealed lock body with cylinder cover to protect cylinder from dirt
- 5-pin cylinder
- Inner components made from non-corrosive materials
- Shock absorbing vinyl casing, also protects painted surfaces
- Hardened or stainless steel shackle

Locks are supplied keyed different. 2 keys supplied with each lock.

Keyed alike upon request



Order Reference	Colour	Shackle Height (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Quantity
805835	● Black	27.50	9.00	23.50	41.50	31.00	45.00	55.00	6
805836	● Blue	27.50	9.00	23.50	41.50	31.00	45.00	55.00	6

Brass Padlocks with stainless steel shackle

- Solid brass body (chrome plated) with stainless steel shackle
- Corrosion resistant
- Precision pin tumbler cylinder
- Optional Engraving on front, back, sides, bottom & key

Locks are supplied keyed different. 2 keys supplied with each lock.

Locks are not key retaining. Keyed alike upon request.

Order Reference	Colour	Shackle Height (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Quantity
805827	● Chrome	14.00	4.50	14.50	23.50	12.50	29.00	28.50	6
805828	● Chrome	21.00	6.00	20.50	32.50	13.00	32.50	40.00	6
805830	● Chrome	24.00	7.00	25.50	39.50	14.50	37.00	49.50	6



Brass Padlocks with hardened steel shackle

- All inner components are non-corrosive
- Brass body and hardened steel shackle
- Precision pin tumbler cylinder
- Optional Engraving on front, back, sides, bottom & key

Locks are supplied keyed different. 2 keys supplied with each lock.

Locks are not key retaining.

Order Reference	Colour	Shackle Height (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Quantity
805831	● Brass	14.00	4.50	14.50	23.50	12.50	29.00	28.50	6
805832	● Brass	21.00	6.00	20.50	32.50	13.00	32.50	40.00	6
805834	● Brass	24.00	7.00	25.50	39.50	14.50	37.00	49.50	6



Combination padlock

- Compact, lightweight lock
- Hardened steel shackle
- 4-digit resettable code

Order Reference	Colour	Shackle Height (mm)	Shackle Diameter (mm)	Shackle Clearance (mm)	Shackle Width (mm)	Depth (mm)	Height (mm)	Width (mm)	Quantity
101963	● Silver, Black	26.00	6.50	19.50	32.50	18.50	47.50	44.50	1



Safety lock & tag carrier

The Safety Lock & Tag Carrier is designed to hold up to 12 safety padlocks and keys, as well as lockout hasps and procedure tags.

- holds up to 12 padlocks
- includes a key strap and carabiners
- can easily be clipped back to back to carry 24 padlocks
- can easily be attached on a belt
- can easily be mounted on a wall
- available in 4 colours

Order Reference	Description	Width (mm)	Height (mm)	Quantity
148866	Safety Lock & Tag Carrier System - Red	194.06	131.83	1 Kit
148865	Safety Lock & Tag Carrier System - Yellow	194.06	131.83	1 Kit
148861	Safety Lock & Tag Carrier System - Green	194.06	131.83	1 Kit
148862	Safety Lock & Tag Carrier System - Blue	194.06	131.83	1 Kit
148863	Write-On Lockout Procedure Tag	76.20	146.05	10 / Pack



Labels for Traditional Nylon padlocks

- Made of durable vinyl, writable using pencil, pen or marker

Order Reference	Text/Legend	Reverse Legend	Material	Brady Material No.	Quantity
051379	DANGER LOCKED OUT, PELIGRO EQUIPO BLOQUEADO, DANGER VERROUILLÉE	PROPERTY OF, PROPIEDAD DE, PROPRIÉTÉ DE	Vinyl	B-826	6



Labels for SafeKey Nylon padlocks

- Made of durable vinyl, writable using pencil, pen or marker

Order Reference	Text/Legend	Reverse Legend	Material	Brady Material No.	Quantity
150555	LOCKED OUT DO NOT REMOVE; VERROUILLÉ NE PAS ENLEVER; EQUIPO BLOQUEADO NO REMUEVA	PROPERTY OF; PROPRIÉTÉ DE; PROPIEDAD DE	Vinyl	B-826	6
150556	LOCKED OUT DO NOT REMOVE; VERROUILLÉ NE PAS ENLEVER; EQUIPO BLOQUEADO NO REMUEVA	PROPERTY OF; PROPRIÉTÉ DE; PROPIEDAD DE	Vinyl	B-826	6



Labels for aluminium padlocks

- Made of durable vinyl, writable using pencil, pen or marker

Order Reference	Text/Legend	Reverse Legend	Material	Brady Material No.	Height (mm)	Width (mm)	Quantity
050289	DANGER LOCKED OUT	PROPERTY OF	Vinyl	B-826	20.32	27.94	6
050292	BLOQUEADO	PROPIEDAD DE	Vinyl	B-826	20.32	27.94	6
050293	VERROUILLÉE	PROPRIÉTÉ DE	Vinyl	B-826	20.32	27.94	6



Labels for steel padlocks

- Made of durable vinyl, writable using pencil, pen or marker
- Supplied with B-674 overlamine strips for enhanced durability

Order Reference	Text/Legend	Reverse Legend	Material	Brady Material No.	Height (mm)	Width (mm)	Quantity
050280	DANGER LOCKED OUT	PROPERTY OF	Vinyl	B-826	19.05	114.30	6
050281	PELIGRO EQUIPO BLOQUEADO	PROPIEDAD DE	Vinyl	B-826	19.05	114.30	6
050283	DANGER VERROUILLÉE	PROPRIÉTÉ DE	Vinyl	B-826	19.05	114.30	6



Padlock tags

- Made of calendered vinyl material that accepts pencil, pen, or marker
- 9.53 mm metal grommet that fits over most padlock shackles
- The grommet area adds another 25.40 mm to the height of the tag giving an overall size of 50.80 x 101.60 mm.

Order Reference	Text/Legend	Material	Height (mm)	Width (mm)	Quantity
105722	DANGER EQUIPMENT LOCKED OUT	Vinyl	76.20	50.80	1
105723	DANGER DO NOT OPERATE	Vinyl	76.20	50.80	1
105724	DANGER DO NOT OPERATE / PELIGRO NO ACTIVE	Vinyl	76.20	50.80	1



Padlock lubricant

- Non-greasing spray for lock cylinders, office machines, tools, car locks, etc.

Order Reference	Description	Quantity
834194	Maintenance spray 50ml	1



“Cobra” cable

- Flexible steel wire with protective PVC coating

Order Reference	Description	Diameter (mm)	Length (m)	Quantity
805844	Cobra Cable	8.00	2.00 m	1



Maximum chain security

- Chain made from hardened special chain steel
- Fabric sleeve protects paint work and chrome from damage

Order Reference	Description	Length (m)	Quantity
805846	Maximum Chain Security - 10 mm diam	1.1 m	2
805845	Maximum Chain Security - 8 mm diam	1.1 m	2



Double loop cable

Double looped cable lockout devices are perfect in any situation that requires a flexible lockout device and a visual deterrent.


- Ideal for locking out large valves in many different industries
- Lightweight alternative to large, heavy chains
- Comes in four lengths to ensure a secure fit

Order Reference	Length (m)	Diameter (mm)	Material	Colour	Quantity
131063	0.61 m	4.57	Steel	Red	1
131064	1.22 m	4.57	Steel	Red	1
131065	1.83 m	4.57	Steel	Red	1
131066	2.44 m	4.57	Steel	Red	1



Brady - your complete work safety solution provider

Find out more about safety products from our extensive portfolio. Visit our websites or contact your nearest Brady representative.

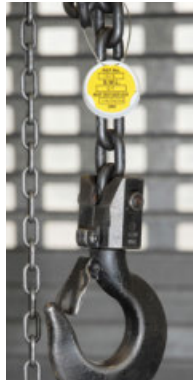

Visual Tagging Solutions

Provide essential records of the safe condition of all your site equipment and scaffolding.

- Simple to implement
- Easy for workers to understand
- Specially designed for rough environments
- Highly visible



Safety Signs - Important information at the point of need

We offer more than 8,000 different signs for safety, maintenance and facility identification.

- Designed to withstand even the harshest industrial environments
- Bright colours, bold text and intuitive pictograms
- Compliant with the latest standards and regulations
- Highly visible and easy to understand communication



Pipe Markers - Easily identify pipe content and flow direction

The correct identification of pipes ensures a better insight into a building's structure. Accidents, injuries and damage can be prevented.



Sorbents - Smart spill control

Clean, fast and safe removal of oil, water and chemicals spills.

- Adsorbs 10-25 times its own weight within a few seconds
- Environmentally friendly
- Spend less time cleaning